




CAR Bearing manufacturing Co.,Ltd

NTN 6220LLU deep groove ball bearings

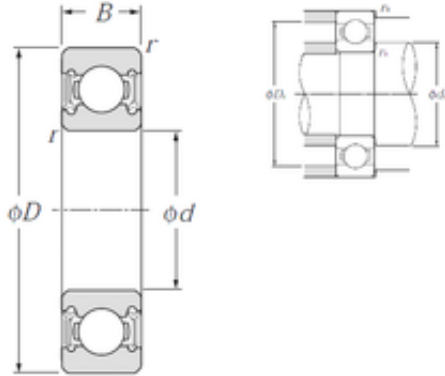

Bearing No. 6220LLU

6220LLU Bearing 2D drawings and 3D CAD models

Size	100x180x34 mm
Bore Diameter	100 mm
Outer Diameter	180 mm
Width	34 mm
d	100 mm
D	180 mm
B	34 mm
C	34 mm
r min.	2,1 mm
da min.	111 mm
da max	122 mm
Da max.	169 mm
ra max.	2 mm
Weight	3,14 Kg
Basic dynamic load rating (C)	122 kN
Basic static load rating (C0)	93 kN
Reference speed	2 300 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling	No



CAR Bearing manufacturing Co.,Ltd

Slot	
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	100MM Bore; 180MM Outside Diameter; 34MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	6.92
Outer Race Width	1.339 Inch 34 Millimeter
Bore	3.937 Inch 100 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	7.087 Inch 180 Millimeter
bore diameter:	100 mm
static load capacity:	93000 N
outside diameter:	180 mm



CAR Bearing manufacturing Co.,Ltd

precision rating:	ISO Class 0
overall width:	34 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	34 mm
snap ring included:	Without Snap Ring
outer ring width:	34 mm
internal clearance:	CN
maximum rpm (grease):	2300 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	2.1 mm
dynamic load capacity:	122000 N
manufacturer product page:	Click here